

Standard Equipment/Optional Equipment

Standard Equipment

Multifunction back lit instrument display

Key switch or Log in Pin code: ignition

Unique and intuitive 45° driving position (SP)

Safety zone operator's compartment with padded leg and backrests with cushioned suspended platform (SP)

Dedicated work station (with storage compartments)

Innovative single handed Linde e-driver® control (SP)

Power assisted steering with speed proportional steering resistance

Positive steering (drive wheel) feedback

Self-centring steering (SP)

Automatic speed reduction when cornering

AC motor

Automatic braking

Electromagnetic emergency brake acting proportionally to the load weight

Cushion drive wheel

Polyurethane active castor wheels

Polyurethane single load wheels

Foldable stand-on platform with side guards (AP)

Horn

Protection -10°C

Optional Equipment

Alternative fork dimensions

Drive wheels: polyurethane, cushion non-marking or wet grip

Load wheels: Tandem polyurethane or single/tandem polyurethane greasable load wheels

Clipboard

On-board mounting for computer or clipboard

Load backrest 1200mm

Mobile and fixed battery stands (for side battery change)

Non marking cushion rubber drive wheels

Width over forks 520, 560, and 680 mm

Fork lengths 1000, 1150, and 2350 mm

Coldstore protection to -35°C

Other options available on request.



Platform Pallet Truck
Capacity 2000 and 2400 kg
T 20 SP/AP, T 24 SP/AP

SERIES 131

Safety

High performance combined with safety. The wraparound steel chassis keeps the operator safe from impacts while working (SP). A low, steel skirt surrounding the stand-on platform protects the operator's feet and legs (SP). The operator's body remains safely within the chassis contours at all times while operating the truck (SP).

Performance

Highly efficient productivity is the Linde pallet truck's true strength. Their performance derives from a powerful 3 kW AC maintenance-free drive motor and active stabilizing castor wheels. Rapid acceleration and impressive travel speed combined with efficient braking in all conditions. This all adds up to outstanding productivity ratios in every type of application.

Comfort

The ergonomic 45° driving posture of the SP version, enables effortless, stress-free multidirectional working with excellent all-round visibility. A padded backrest and cushioned stand-on platform provide added comfort. A comfortable operator remains motivated and maintains high efficiency levels throughout the working shift.

Reliability

The highly durable, robot welded construction of the SP and AP ensures consistent reliability and long life in demanding applications. Each heavy cast fork tip can support a load of 2,000 kg without deformation. Smooth entry into bottom boarded pallets is assisted by the ski contours of the underside of the fork tips. The arrow shaped fork tips also facilitate easy entry into every type of pallet and through shrink wrapping for fast, efficient and safe load handling.

Service

Efficiency at work and efficiency in servicing with cost effective maintenance routines. Easy access to all components and maintenance-free technology also play their part. CAN bus connectivity provides a computerised diagnostic system for rapid analysis to ensure maintenance intervals are minimised.


Features

Total drive system

- Electronically controlled, hydraulically suspended castor wheels automatically select optimum ratio between stability and traction
- Automatic electric braking when traction lever is released to neutral
- Smooth counter current braking and no roll back on gradient starts
- Proportional electromagnetic braking on drive motor initiated by emergency isolator or release of pressure on deadman switch

Linde e-driver®

- Unique Linde e-driver controller, the perfect interface between truck and operator
- Asymmetrical design leaves more room for first-level access
- Enables effortless one-handed operation
- All controls grouped on the controller
- Combines with 45° driving posture

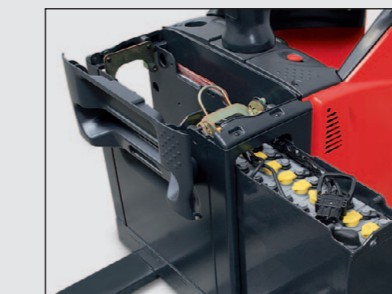

Batteries and chargers

- Vertical battery change as standard
- Optional battery on rollers for side changing to left or right
- Battery locking device secures battery within the chassis
- Choice of batteries from 250Ah (2PzS) to 620 Ah (5PzS) to suit every type of application
- Wide range of standard and wall-mount chargers to suit every power supply requirement



Ideal 45° driving position

- The 45° driving posture (SP) provides effortless multi-directional driving
- Superbly functional Linde e-driver controls
- Cushioned platform and padded backrest
- Outstanding stability with automatic slowdown when cornering

Workstation

- Digital multifunction display
- Truck access control by unique PIN code or by ignition key
- Wide and deep storage compartments for wrapping paper, work gloves, writing utensils, etc.



CAN bus connectivity

- On-board diagnostics and CAN bus interface
- Provides service technician with rapid access to all truck data for performance parameter settings, trouble shooting and preventative maintenance



AC motor

- Powerful, 3 kW drive motor
- Moisture and dust proof motor is maintenance-free
- The truck accelerates smoothly to 10 km/h in less than 5 metres
- Max. speed of 10 km/h laden/unladen
- Gradient performance 13% fully laden
- No roll back on gradient starts
- High torque motor negotiates loading docks with ease

Power steering for comfort and safety

- Self-centring, power assisted steering keeps truck on track in a straight line (SP)
- Steering effort adjusts automatically to speed and turning radius
- Speed is automatically reduced in relation to the steering angle
- The result is effortless manoeuvring and safe, highly efficient load handling

Linde Material Handling Division, Postfach 10 01 36, 63701 Aschaffenburg, Germany
Phone +49.60 21.99-0, Fax +49.60 21.99-15 70, www.linde-mh.com, info@linde-mh.com



Subject to modification in the interests of progress. Illustrations and technical details not binding for actual constructions. All dimensions subject to usual tolerances.



Printed in Germany 108.e. 3.1.211.LinDB.K1

Technical Data according to VDI 2198

Characteristics	T20SP		T24SP		T20AP		T24AP	
	Manufacturer	Model designation	Power unit	Operation	Load capacity	Load centre	Axle centre to fork face	Wheelbase
1.1	Manufacturer	LINDE	LINDE	LINDE	LINDE	LINDE	LINDE	LINDE
1.2	Model designation	T20SP	T24SP	T20AP	T24AP	T20AP	T24AP	T24AP
1.3	Power unit	Battery	Battery	Battery	Battery	Battery	Battery	Battery
1.4	Operation	Pedestrian / Stand-on	Pedestrian / Stand-on	Pedestrian / Stand-on	Pedestrian / Stand-on	Pedestrian / Stand-on	Pedestrian / Stand-on	Pedestrian / Stand-on
1.5	Load capacity	Q (t)	2.0	2.4	2.0	2.4	2.0	2.4
1.6	Load centre	c (mm)	600	600	600	600	600	600
1.8	Axle centre to fork face	x (mm)	895 / 962 ¹⁾	895 / 962 ¹⁾	895 / 962 ¹⁾	895 / 962 ¹⁾	895 / 962 ¹⁾	895 / 962 ¹⁾
1.9	Wheelbase	y (mm)	1359 / 1425 ¹⁾	1359 / 1425 ¹⁾	1359 / 1425 ¹⁾	1359 / 1425 ¹⁾	1359 / 1425 ¹⁾	1359 / 1425 ¹⁾
Weights	2.1	Service weight	(kg)	800 ²⁾	800 ²⁾	770 ²⁾	770 ²⁾	770 ²⁾
	2.2	Axle load with load, front/rear	(kg)	1125 / 1675 ²⁾	1211 / 1989 ²⁾	1095 / 1675 ²⁾	1181 / 1989 ²⁾	1181 / 1989 ²⁾
2.3	Axle load without load, front/rear	(kg)	660 / 140 ²⁾	660 / 140 ²⁾	630 / 140 ²⁾	630 / 140 ²⁾	630 / 140 ²⁾	
Wheels/Tyres	3.1	Tyres rubber, SE, pneumatic, polyurethane		V+P/P ³⁾	V+P/P ³⁾	V+P/P ³⁾	V+P/P ³⁾	V+P/P ³⁾
	3.2	Tyre size, front		Ø 254 x 102	Ø 254 x 102	Ø 254 x 102	Ø 254 x 102	Ø 254 x 102
3.3	Tyre size, rear		Ø 85 x 105	Ø 85 x 105	Ø 85 x 105	Ø 85 x 105	Ø 85 x 105	
3.4	Auxiliary wheels (dimensions)		125x60	125x60	125x60	125x60	125x60	
3.5	Wheels, number front/rear (x = driven)		1x + 2 / 2	1x + 2 / 2	1x + 2 / 2	1x + 2 / 2	1x + 2 / 2	
3.6	Track width, front	b10 (mm)	544	544	544	544	544	
3.7	Track width, rear	b11 (mm)	355 / 395 / 515	355 / 395 / 515	355 / 395 / 515	355 / 395 / 515	355 / 395 / 515	
Dimensions	4.4	Lift	h3 (mm)	125	125	125	125	125
	4.8	Height of seat/stand-on platform	h7 (mm)	160	160	160	160	160
4.9	Height of tiller arm in operating position, min/max	h14 (mm)	1160	1160	1103 / 1287	1103 / 1287	1103 / 1287	
4.15	fork height, lowered	h13 (mm)	85	85	85	85	85	
4.19	Overall length	l1 (mm)	2274	2274	2216	2216	2216	
4.20	Length to fork face	l2 (mm)	1124	1124	697 / 1066 ⁴⁾	697 / 1066 ⁴⁾	697 / 1066 ⁴⁾	
4.21	Overall width	b1/b2 (mm)	790	790	790	790	790	
4.22	Fork dimensions	s/e/l (mm)	55 x 165 x 1150	55 x 165 x 1150	55 x 165 x 1150	55 x 165 x 1150	55 x 165 x 1150	
4.25	Fork spread, min/max	b5 (mm)	520 / 560 / 680	520 / 560 / 680	520 / 560 / 680	520 / 560 / 680	520 / 560 / 680	
4.32	Ground clearance, centre of wheelbase	m2 (mm)	30 / 155 ⁵⁾	30 / 155 ⁵⁾	30 / 155 ⁵⁾	30 / 155 ⁵⁾	30 / 155 ⁵⁾	
4.33	Aisle width with pallet 1000 x 1200 across forks	Ast (mm)	2828 ⁶⁾	2828 ⁶⁾	2431 / 2760 ⁶⁾	2431 / 2760 ⁶⁾	2431 / 2760 ⁶⁾	
4.34	Aisle width with pallet 800 x 1200 along forks	Ast (mm)	2722 ⁶⁾	2722 ⁶⁾	2325 / 2624 ⁶⁾	2325 / 2624 ⁶⁾	2325 / 2624 ⁶⁾	
4.35	Turning radius	Wa (mm)	2019	2019	1622 / 1959	1622 / 1959	1622 / 1959	
Performance	5.1	Travel speed, with/without load	(km/h)	10 / 10	10 / 10	10 / 10	10 / 10	10 / 10
	5.2	Lifting speed, with/without load	(m/s)	0.036 / 0.043	0.027 / 0.034	0.036 / 0.043	0.027 / 0.034	0.027 / 0.034
5.3	Lowering speed, with/without load	(m/s)	0.064 / 0.06	0.065 / 0.06	0.064 / 0.06	0.065 / 0.06	0.065 / 0.06	
5.8	Maximum climbing ability, with/without load	(%)	13.0 / 20.0	11.0 / 20.0	13.0 / 20.0	11.0 / 20.0	13.0 / 20.0	
5.10	Service brake		Electro-magnetic	Electro-magnetic	Electro-magnetic	Electro-magnetic	Electro-magnetic	
Drive	6.1	Drive motor, 60 minute rating	(kW)	3	3	3	3	3
	6.2	Lift motor rating at 53 15%	(kW)	1.2	1.5	1.2	1.5	1.5
6.3	Battery according to DIN 43531/35/36 A,B,C,no		43 535 / B	43 535 / B	43 535 / B	43 535 / B	43 535 / B	
6.4	Battery voltage/rated capacity (5h)	(V/Ah)	24 / 240	24 / 240	24 / 240	24 / 240	24 / 240	
6.5	Battery weight (± 5%)	(kg)	200	200	200	200	200	
6.6	Power consumption according to VDI cycle	(kWh/h)	0,48 / -	0,48 / -	0,48 / -	0,48 / -	0,48 / -	
Others	8.1	Type of drive control		LAC	LAC	LAC	LAC	LAC
	8.4	Noise level at operator's ear	(dB(A))	<70.0	<70.0	<70.0	<70.0	<70.0

1) Forks upraised / lowered
 2) Figures with battery, see line 6.4/6.5.
 3) Solid rubber + polyurethane / polyurethane

4) Platform raised/lowered.
 5) min./max.
 6) Including a 200 mm (min.) operating aisle clearance.

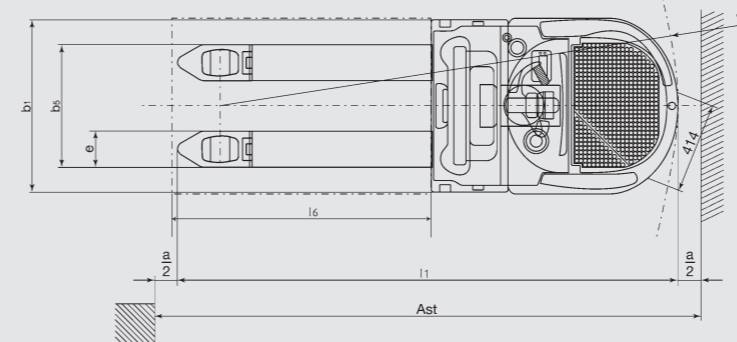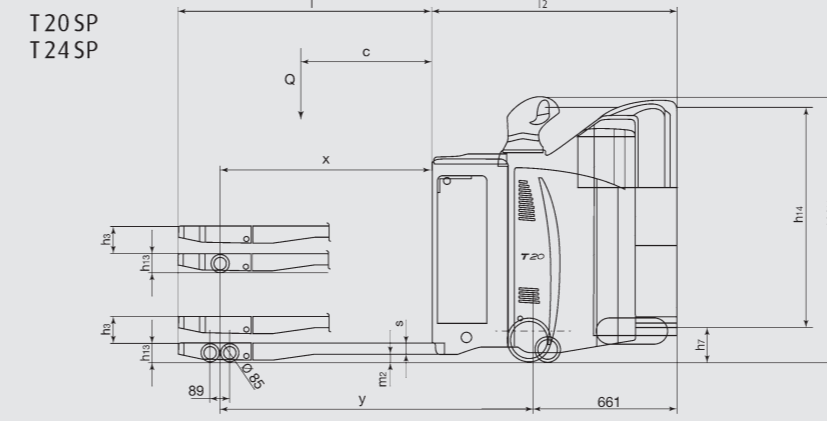

AST = Wa - x + l6 + a; Safety clearance a = 200 mm

